

SKID STEER LOADERS

**SR130 | SR150 | SR175 | SV185 | SR200
SR220 | SV250 | SR250 | SV300**

CASE

CONSTRUCTION



**POWER OUTSIDE,
COMFORT INSIDE**

www.casece.com

**EXPERTS FOR THE REAL WORLD
SINCE 1842**

STATE OF THE ART GENERATION

CASE SKID STEER LOADERS




A TOUGH TEAM

Case skid steers have always been known for power and productivity. With our nine skid steers we can compete everywhere. “Bullet proof” sums it up. Our lineup of skid steers delivers industry-leading bucket breakout force (up to 3,894 kg / 8,585 lb) and hinge-pin height. Plus, best-in-class horsepower model by model. By any measure, Case skid steers will boost your performance and productivity.


WE’VE GOT THE POWER

Whatever your job, Case has a skid steer that can handle it. From our smallest model, the 590 kg capacity SR130, to the powerful 1360 kg SV300*, we’ve got the muscle to get the job done. Our radial lift (SR) models are engineered for digging, prying and pushing, while our vertical lift (SV) models are for lift-and-carry jobs.

* 3200 ROC with counter weights

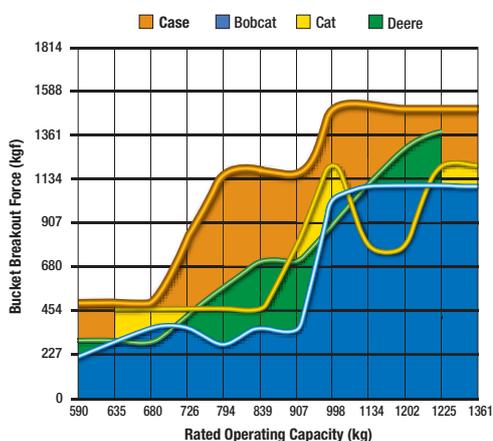

(Information gathered from manufacturers' published specifications.)
Compare us to the competition.
You'll feel the superior breakout force.

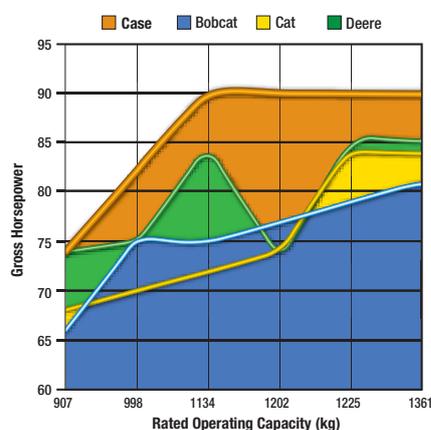

(Information gathered from manufacturers' published specifications.)
You get more horsepower with Case.

LOVE WHERE YOU WORK

Climb in the cab and you'll feel the difference. We know your cab is your workplace, so we designed an operating environment that delivers more room, visibility, comfort and control. We also sealed the cab to significantly reduce the amount of noise and dust.

Our cabs are the widest in the industry. They feature a revolutionary ultra-narrow wire side-screen design with more glass surface area to provide 360-degree visibility. Add Case-exclusive side lighting, and you can get more done - day or night.

BREAK-THROUGH ENGINEERING

With the Case skid steer lineup, you can choose from standard mechanical drives or optional electro-hydraulic (EH) switchable controls. With the EH option, you can match control patterns to operator preference.

Case engineers also developed our Power Stance chassis with up to 21 percent longer wheelbase and 30/70 front/rear weight distribution. Why? To lift and haul more material. Combined with Ride Control, our skid steers provide superior stability and operating speeds, regardless of jobsite conditions.

Plus, here's one more advantage: Case skid steers will run all day without refueling, thanks to improved fuel efficiency and new 60.5- to 96.5-lt fuel tanks.

SEE FOR YOURSELF

Want more info? Visit www.Casece.com. Then, see your Case dealer for a demonstration, and put a Case skid steer to work.

BEST-IN-CLASS SERVICEABILITY

Ask your technicians. Case has a reputation for easy-to-maintain and service equipment. Case skid steers are no exception. The Case design dominates the industry's top SAE serviceability rankings with features such as easy, ground-line access for daily maintenance checks.



With a quick-coupler, you can switch attachments without leaving the cab.

SPECIFICATIONS

	SR130	SR150	SR175	SV185	SR200	SR220
ENGINE	ISM 420/M3	ISM 420T/M3	ISM 422T/M3	ISM 422T/M3	FPT 432T/M3	FPT 432T/M3
Gross hp (kW)	49 hp (36 kW) @ 2800 rpm	60 hp (45 kW) @ 2800 rpm	60 hp (45 kW) @ 2800 rpm	60 hp (45 kW) @ 2800 rpm	74 hp (55 kW) @ 2500 rpm	82 hp (61 kW) @ 2500 rpm
Net hp (kW)	46 hp (34 kW) @ 2800 rpm	57 hp (42 kW) @ 2800 rpm	57 hp (42 kW) @ 2800 rpm	57 hp (42 kW) @ 2800 rpm	68 hp (51 kW) @ 2500 rpm	76 hp (57 kW) @ 2500 rpm
Peak torque	143 Nm @1.800 rpm	171 Nm @ 1.800 rpm	171 Nm @ 1800 rpm	171 Nm @ 1800 rpm	275 Nm @1400 rpm	305 Nm @1400 rpm
Displacement	2.2 l	2.2 l	2.2 l	2.2 l	3.2 l	3.2 l
RATED OPERATING CAPACITY*						
50%	590 kg	680 kg	790 kg	840 kg	905 kg	1000 kg
Tipping load	1179 kg	1361 kg	1588 kg	1678 kg	1814 kg	1996 kg
BREAKOUT FORCE						
Bucket cylinder	18.5 kN	18.6 kN	32.3 kN	24.7 kN	32.3 kN	38.7 kN
Operating weight	2300 kg	2430 kg	2842 kg	2980 kg	3160 kg	3350 kg

	SR250	SV250	SV300
ENGINE	FPT 432T/M3	FPT 432T/M3	Case 432T/M3
Gross hp (kW)	90 hp (67 kW) @ 2500 rpm	82 hp (61 kW) @ 2500 rpm	90 hp (67 kW) @ 2500 rpm
Net hp (kW)	84 hp (63 kW) @ 2500 rpm	76 hp (57 kW) @ 2500 rpm	84 hp (63 kW) @ 2500 rpm
Peak torque	340 Nm @ 1400 rpm	305 Nm @ 1400 rpm	340 Nm @ 1400 rpm
Displacement	3.2 l	3.2 l	3.2 l
RATED OPERATING CAPACITY*			
50%	1135 kg	1135 kg	1360 kg
Tipping load	2268 kg	2268 kg	2722 kg
BREAKOUT FORCE			
Bucket cylinder	33.3 kN	33.7 kN	33.7 kN
Operating weight	3490 kg	3630 kg	3765 kg



NOTE: CASE provides specific outfits for various countries and many optional fittings (OPT). The illustrations on this or other leaflets may relate to standard or optional fittings. Please consult your CASE dealer for any information in this regard and any possible updating on components. CNH Industrial reserves the right to modify machine specifications without incurring any obligation relating to such changes.